

Item# _____
Project: _____
Qty: _____



Glass Door Reach-In Freezer

GF-12

12 cu. ft. Freezer

GF-16

16 cu. ft. Freezer



GF-23 Single Door Freezer



GF-35 Double Door Freezer



GF-48 Double Door Freezer



Features

- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free and Insulation
- Self-Closing Door
- Low-e Triple Pane Glass Doors Remain Open Past 90°
- Epoxy Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- LED Internal Lamp
- Top Illuminated Top Panel

Serv-Ware GF Series Freezers are UL Safety and UL Sanitation Approved.

Featured with white powder coated steel interior and exterior, triple pane glass, self-closing lockable door, digital controls with a LED readout and foamed in place polyurethane cell insulation. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between -10°F and 0° F.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 2/17


Fax:(800).976.1299



Serv-Ware

Glass Door Reach-In Freezer

GF-12 (A) & GF-16 (B) Single Door

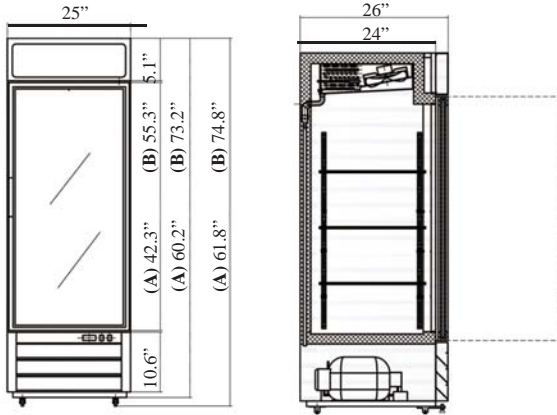

Dimensions

(A) GF-12
25" W x 26" D x 61.8" H
12 cu. ft.
276 lbs.

(B) GF-16
25" x W x 26" D x 74.8" H
16 cu. ft.
291 lbs.

Construction

Exterior Material
Interior Material
Insulation Material
Shelf Material

Powder Coated White Steel
Powder Coated White Steel
CFC Free Foam
3 Epoxy Coated Wire

Cooling

Temperature Range
Refrigerant
Defrosting
H/P

-10°F – 0°F
R404A
Every 6 Hours
GF-12 - $\frac{3}{8}$
GF-16 - $\frac{5}{8}$

Electrical

Voltage 115
Amps 6
Hz 60
Phase 1

Dimensions

Exterior Dimensions 27" W x 32" D x 79.5" H
Net Volume 23 cu. ft.
Net Weight 352 lbs

Construction

Exterior Material Powder Coated White Steel
Interior Material Powder Coated White Steel
Insulation Material CFC Free Foam
Shelf Material 4 Epoxy Coated Wire


Cooling

Temperature Range -10° – 0°F
Refrigerant R404A
Defrosting Every 6 Hours
H/P $\frac{5}{8}$


Electrical

Voltage 115
Amps 11
Hz 60
Phase 1

GF-23 Single Door

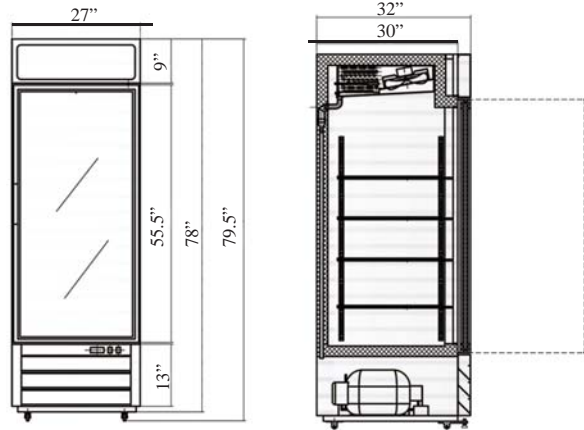

GF-35 (A) & GF-48 (B) Double Door

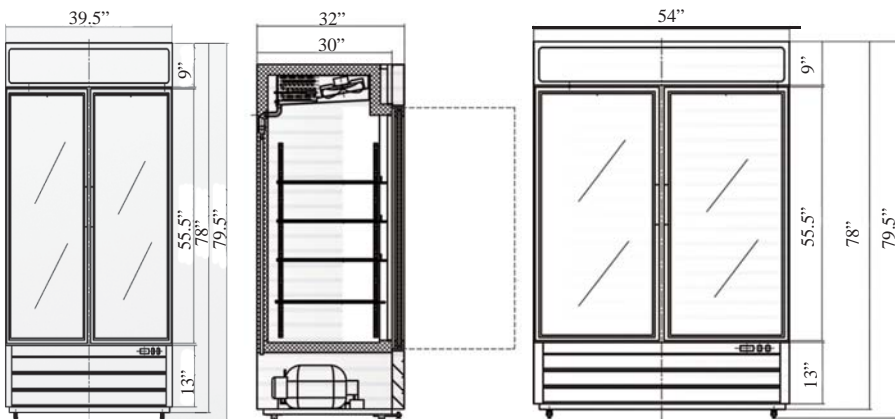

Dimensions

GF-35
39.5" W x 32" D x 79.5" H
35 cu. ft.
493 lbs.

GF-48
54" x W x 32" D x 79.5" H
49 cu. ft.
569 lbs.

Construction

Exterior Material Powder Coated White Steel
Interior Material Powder Coated White Steel
Insulation Material CFC Free Foam
Shelf Material 8 Epoxy Coated Wire (4 Per Door)

Cooling

Temperature Range -10° – 0°F
Refrigerant R404A
Defrosting Every 6 Hours
H/P 1

Electrical

Voltage 115
Amps 12
Hz 60
Phase 1