

Item# _____
Project: _____
Qty: _____

Glass Door Reach-In Refrigerator



GR-12
12 cu. ft. Refrigerator

GR-16
16 cu. ft. Refrigerator



GR-23
Single Door Refrigerator



GR-35
Double Door Refrigerator



GR-48
Double Door Refrigerator



Features

- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free Insulation
- Self-Closing Doors
- Double Pane Glass Doors Remain Open Past 90°
Low-e Double Pane Glass Doors
- Epoxy Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- LED Internal Lamp
- Top Illuminated Top Panel

Serv-Ware GR Series Refrigerators are UL Safety and UL Sanitation Approved.

Featured with white powder coated steel interior and exterior, double pane glass, self-closing lockable doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Model GR-35 is featured with low-e triple pane glass doors. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between 33° F and 41° F.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 2/17


Fax:(800).976.1299



Serv-Ware

Glass Door Reach-In Refrigerator

GR-12 (A) & GR-16 (B) Single Door

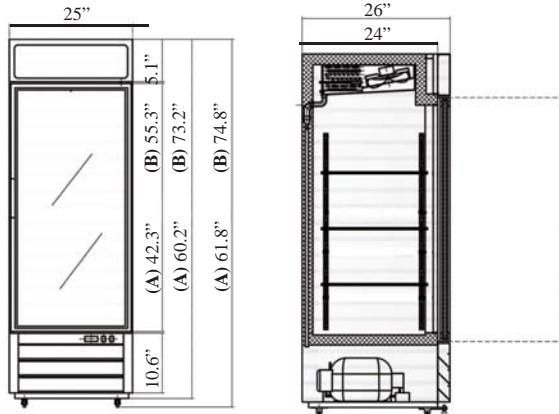

Dimensions

(A) GR-12
25" W x 26" D x 61.8" H
12 cu. ft.
250 lbs.

(B) GR-16
25" x W x 26" D x 74.8" H
16 cu. ft.
283 lbs.

Construction

Exterior Material Powder Coated White Steel
Interior Material Powder Coated White Steel
Insulation Material CFC Free Foam
Shelf Material 3 Epoxy Coated Wire

Cooling

Temperature Range 33°F – 41°F
Refrigerant R13A4
Defrosting Every 6 Hours
H/P 3/8

Electrical

Voltage 115
Amps 6
Hz 60
Phase 1

Dimensions

Exterior Dimensions 27" W x 32" D x 79.5" H
Net Volume 23 cu. ft.
Net Weight 353 lbs

Construction

Exterior Material Powder Coated White Steel
Interior Material Powder Coated White Steel
Insulation Material CFC Free Foam
Shelf Material 4 Epoxy Coated Wire


Cooling

Temperature Range 33° – 41°F
Refrigerant R13A4
Defrosting Every 6 Hours
H/P 3/8


Electrical

Voltage 115
Amps 6
Hz 60
Phase 1

GR-23 Single Door

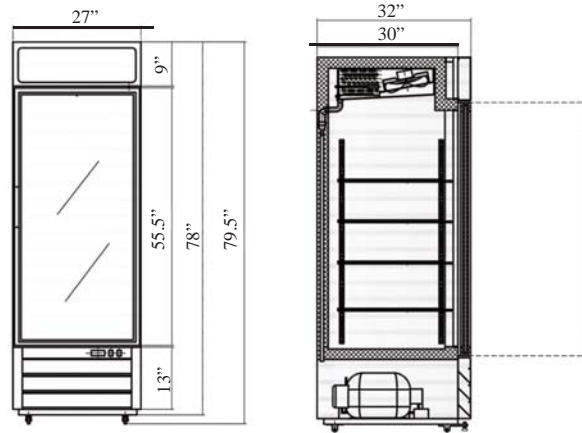

GR-35 (A) & GR-48 (B) Double Door

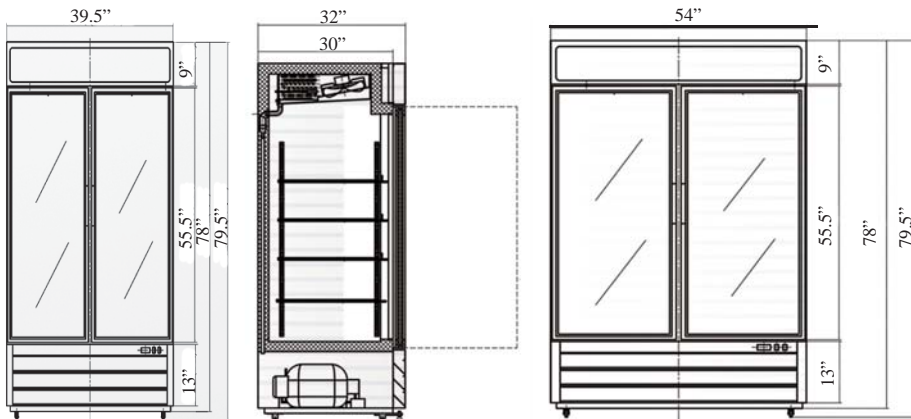

Dimensions

(A) GR-35
39.5" W x 32" D x 79.5" H
35 cu. ft.
461 lbs.

(B) GR-48
54" x W x 32" D x 79.5" H
49 cu. ft.
547 lbs.

Construction

Exterior Material Powder Coated White Steel
Interior Material Powder Coated White Steel
Insulation Material CFC Free Foam
Shelf Material 8 Epoxy Coated Wire (4 Per Door)

Cooling

Temperature Range 33° – 41°F
Refrigerant R13A4
Defrosting Every 6 Hours
H/P 1/2

Electrical

Voltage 115
Amps 7
Hz 60
Phase 1



Serv-Ware
www.servware.com

Phone: (800).768.5953

Revised 2/17

Fax: (800).976.1299



Serv-Ware