

Item# \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_

# Glass Door Reach-In Refrigerator - Stainless Steel

**RR-1-27G**



**RR-2-49G**



Serv-Ware

## Features

- CFC Free Refrigerant and Foam
- Electronic Thermostat and Digital LED Temperature Display for Accurate Control and Easy Reading
- Self-Closing Door
- Magnetic Gasket can be Replaced without any Tool
- Heating Element Conceal in Door Frame to Eliminate any Condensation
- Material: External: S/S 430  
Bottom of Internal: S/S 304, other Parts of Internal:  
Aluminum Painted

Serv-Ware GR Series Refrigerators are UL Safety and UL Sanitation Approved.

Featured with aluminum painted interior, heavy duty 304 stainless steel floor, 430 stainless steel exterior and self-closing glass doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between 33° F and 41° F.

**Conforms to UL471, CSA C22.2 and NSF 7 Standards.**

**Two Year** - Parts & Labor on entire unit. Valid in United States  
**Three Year** - Additional Compressor, Part Only



Serv-Ware  
[www.servware.com](http://www.servware.com)

Phone:(800).768.5953

Revised 1/17

Fax:(800).976.1299



Item# \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

# Glass Door Reach-In Refrigerator - Stainless Steel

## RR-1-27G

### Dimensions

26.8" W x 31.9" D x 82.7" H  
23 cu. ft.  
351 lbs.

### Construction


**Exterior Material** 430 Stainless Steel  
**Interior Material** Painted Aluminum  
**Insulation Material** 304 S/S Floor  
**Shelf Material** CFC Free Foam  
3 Epoxy Coated Wire

### Cooling

**Temperature Range** 33°F – 41°F  
**Refrigerant** R13A4  
**Defrosting** Every 6 Hours  
**H/P** 3/8

### Electrical

**Voltage** 115  
**Amps** 6  
**Hz** 60  
**Phase** 1

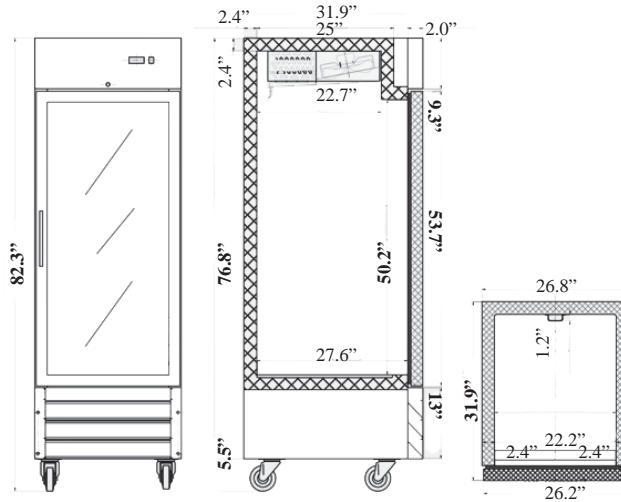

## RR-2-49G

### Dimensions

53.9" W x 31.9" D x 82.7" H  
49 cu. ft.  
538 lbs.

### Construction


**Exterior Material** 430 Stainless Steel  
**Interior Material** Painted Aluminum  
**Insulation Material** 304 S/S Floor  
**Shelf Material** CFC Free Foam  
3 Epoxy Coated Wire

### Cooling

**Temperature Range** 33°F – 41°F  
**Refrigerant** R13A4  
**Defrosting** Every 6 Hours  
**H/P** 1/2

### Electrical

**Voltage** 115  
**Amps** 9  
**Hz** 60  
**Phase** 1

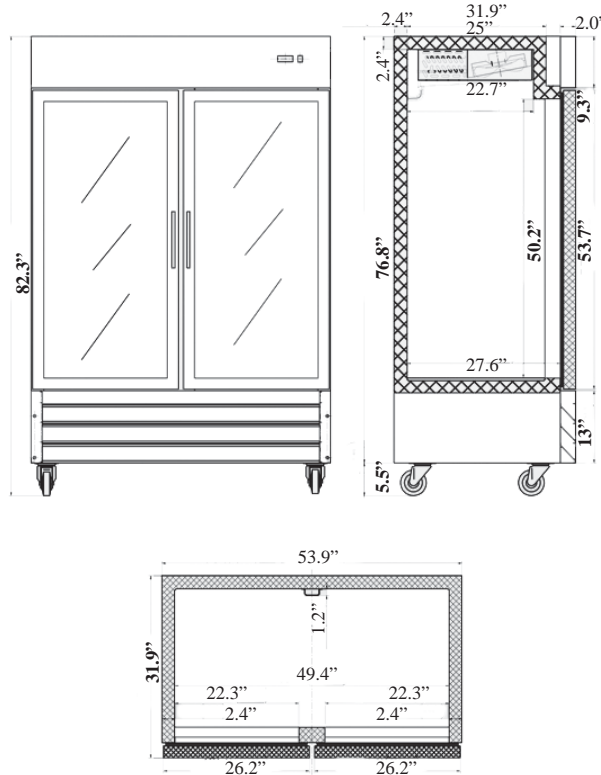

Serv-Ware



Serv-Ware  
www.servware.com

Phone: (800).768.5953

Revised 1/17

Fax: (800).976.1299

