


Item# _____
 Project: _____
 Qty: _____

Green Epoxy Wire Shelving

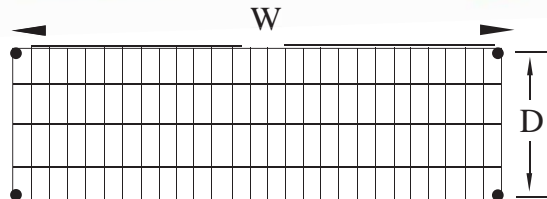

Features

- Load Capacity 600-800lbs
- Electro Statically Applied Powder Epoxy Coating
- Thermal Cured Hard Satin Gloss Finish
- Numbered Post for Easy Assembly
- Also Available in Silver Epoxy

Green Epoxy Post		
Model	Size	Weight
GR14CWP	14"	1
GR34CWP	34"	2
GR54CWP	54"	3
GR63CWP	63"	4
GR74CWP	74"	5
GR86CWP	86"	6



Model	Size (D x W)	Weight/lbs (Shipping)
GR1424CWP	14" x 24"	6
GR1430CWP	14" x 30"	7
GR1436CWP	14" x 36"	8
GR1442CWP	14" x 42"	10
GR1448CWP	14" x 48"	11
GR1454CWP	14" x 54"	12
GR1460CWP	14" x 60"	14
GR1472CWP	14" x 72"	18

Model	Size (D x W)	Weight/lbs (Shipping)
GR2124CWP	21" x 24"	8
GR2130CWP	21" x 30"	9
GR2136CWP	21" x 36"	11
GR2142CWP	21" x 42"	12
GR2148CWP	21" x 48"	14
GR2154CWP	21" x 54"	16
GR2160CWP	21" x 60"	18
GR2172CWP	21" x 72"	24

Model	Size (D x W)	Weight/lbs (Shipping)
GR1824CWP	18" x 24"	7
GR1830CWP	18" x 30"	8
GR1836CWP	18" x 36"	9
GR1842CWP	18" x 42"	11
GR1848CWP	18" x 48"	12
GR1854CWP	18" x 54"	15
GR1860CWP	18" x 60"	17
GR1872CWP	18" x 72"	20

Model	Size (D x W)	Weight/lbs (Shipping)
GR2424CWP	24" x 24"	9
GR2430CWP	24" x 30"	11
GR2436CWP	24" x 36"	13
GR2442CWP	24" x 42"	15
GR2448CWP	24" x 48"	16
GR2454CWP	24" x 54"	19
GR2460CWP	24" x 60"	21
GR2472CWP	24" x 72"	26
GR3036CWP	30" x 36"	15
GR3048CWP	30" x 48"	20
GR3060CWP	30" x 60"	25
GR3072CWP	30" x 72"	30

Please See Catalog for Wall Brackets.

Serv-Ware
www.servware.com

Phone: (800).768.5953

Fax: (800).976.1299

Revised 11/16



Item# _____

Project: _____

Qty: _____

Green Epoxy Wire Shelving

- General:** Shelving shall be of the type manufactured by Serv-Ware Products. It shall carry the approval of the National Sanitation Foundation (NSF).
- Material:** Shelves shall be composed of bright basic carbon steel wire, being either chrome plated or epoxy coated in finish. Posts shall be cold rolled carbon steel tubing, electric welded, being either chrome plated or epoxy coated in finish.
- Shelves:** Construction shall be of open wire design to offer better visibility, less weight, increased air circulation, and minimal accumulation of dust.
- Fabrication:** Face ribs shall run front to back, equally spaced on 13/16" centers and to be 8 gauge (0.145") wire. All four sides of each shelf shall consist of a corrugated reinforcing truss of 8 gauge (0.192) wire. At the front and back of the shelf, this corrugated reinforcing shell be welded to 1/4" (0.250") rib wire running perpendicular and above the face ribs. A 1/4" (0.250") rib shall be welded to the bottom of the truss. At the ends of the shelf, the corrugated reinforcing truss shall be welded to the parallel 1/4" (0.250") wire ribs. Depending upon the width and length of the shelf, it shall have three or five longitudinal ribs (0.192" wire) welded to the face ribs. In addition, certain longer lengths shall have one or two corrugated reinforcing trusses (0.192") welded to the underside. At each corner of the shelf, there shall be a tapered, conical fitting, made of 12 gauge (0.104") cold rolled steel to the parallel rib supports. The fitting shall be designed to accommodate the vertical supports. The corrugated truss shall be in the shape of the letter "V".
- Posts:** Shall be of 1" O.D. round, cold rolled carbon steel tubing, 18 gauge (0.062") thickness. They shall have rolled grooves spaced at 1" on centers along the length. The top of the post shall have a finished plastic cap and the bottom shall have a die cast insert, threaded with an adjustable leveling foot. Between the grooves shall be consecutive numbering starting at the bottom of the post to insure accurate alignment of the shelf clips.
- Method Of Assembly:** Shall be of a tapered conical design implementing a two part tapered plastic clip. Securing of the two part clip shall be accomplished with a protruding bead on the inside of the shelf clip which will match the groove in the post. Two shelf clips shall be attached to each corner post for each shelf. Both the clips and the corner fitting of the shelves shall have a matching taper, creating a wedge-like effect, locking the shelf securely in the desired position. No other hardware shall be required to complete this assembly. Shelves shall be adjustable on 1" vertical increments.
- Load Capacity:** 600 – 800 lbs. per shelf evenly distributed, depending upon the size. Maximum load per assembled unit not to exceed 2,000 lbs. without casters.
- Packing:** Shelves are packed 4 per carton, except for 60" and 72" lengths, which are packed in quantities of 2 per carton. Posts are packed in quantities of 4 per carton.



Serv-Ware
www.servware.com

Phone:(800).768.5953

Fax:(800).976.1299

Revised 11/16

