

Item# _____
Project: _____
Qty: _____

Pizza Prep Table

PP44-6
6 Pan



PP67-9
9 Pan



PP93-12
12 Pan



Features

- CFC Free Refrigerant and Foam
- AISI 304 Stainless Steel Framework Construction
- Electronic Thermostat and Digital LED Temperature Display for Accurate Control and Easy Reading
- Auto Defrosting and Auto Evaporation of Condensation Water
- Magnetic Gaskets can be Replaced without any Tool
- PC Plastic Pans and Plastic Cutting Board are Included

Serv-Ware PP Series Pizza Prep Tables are UL Safety and UL Sanitation Approved.

Featured with stainless steel exterior, ABS interior liner, aluminum back, self-closing door, digital controls with a LED readout, foamed in place polyurethane cell insulation, stainless steel slide rail work area with cutting board and a cold topping holding area. The hinged cover helps keep your condiments, meats and vegetables cold during off-peak hours. Unit is shipped with casters installed (2 Brake and 2 Non Brake).

1/3 size can plastic pans are included with 1 epoxy coated wire shelf per door, all with adjustable mounting brackets for greater flexibility.

The rear mounted compressor is designed to hold temperatures between 33° F - 41°F.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 2/17

Fax:(800).976.1299



Certified to ANSI/NSF 7


Serv-Ware

Pizza Prep Table

Item# _____


Project: _____

Qty: _____

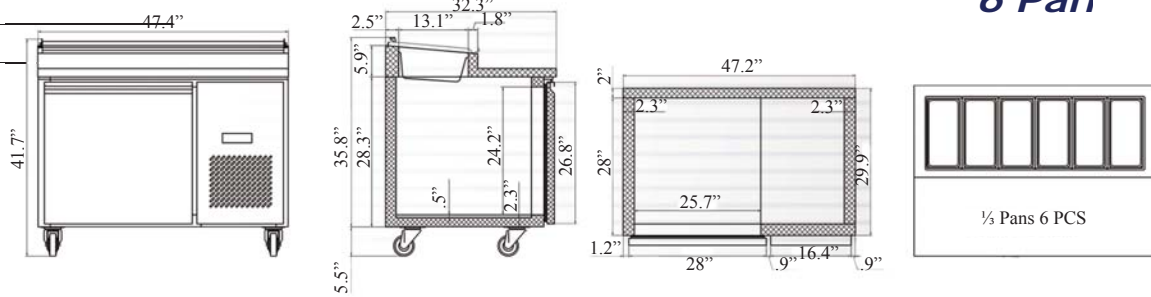


6 Pan

9 Pan

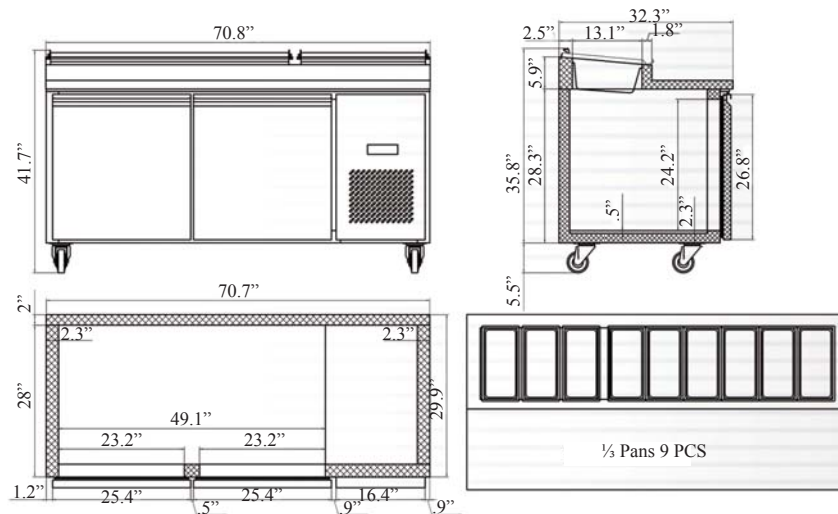

12 Pan

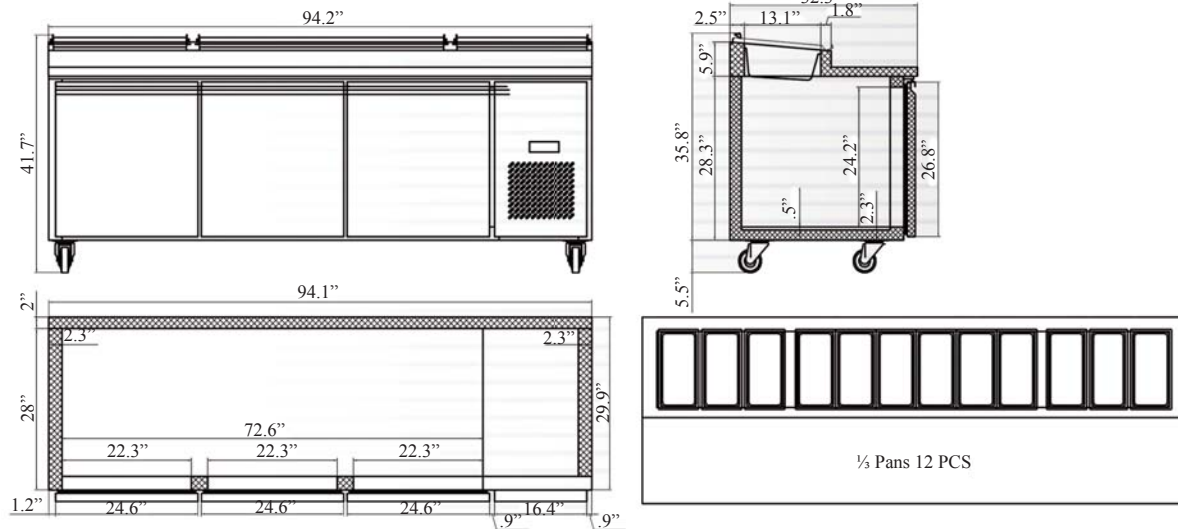

MODEL	EXTERNAL DIMENSION inch (W x D x H)	V/Hz/Ph	AMPS	STORAGE CAPACITY Cu-ft	HP	TEMPERATURE	NEMA PLUG	CERTIFICATION	WEIGHT
PP44-6	47.4" x 32.3" x 41.3"	115V/60Hz/1	7	12	3/8	33°F - 41°F	5-15P	UL/cUL/NSF	307
PP67-9	70.8" x 32.3" x 41.3"	115V/60Hz/1	7.5	22	3/8	33°F - 41°F	5-15P	UL/cUL/NSF	410
PP93-12	94.2" x 32.3" x 41.3"	115V/60Hz/1	9	32	3/4	33°F - 41°F	5-15P	UL/cUL/NSF	525

Serv-Ware



Serv-Ware
www.servware.com

Phone: (800).768.5953

Revised 2/17

Fax: (800).976.1299



Certified to ANSI/NSF 7