

Item# _____
Project: _____
Qty: _____

Mixers

PM10LA



PM20-PTO



PM30-PTO



Features

- Gear driven, high torque transmission
- Three speeds
- Manual timer (20 & 30 quart only)
- Heat-treated hardened steel alloy gears and shafts
- Permanently lubricated transmission
- Thermal overload protection
- Rigid cast iron body
- Stainless steel bowl guard
- Safety interlocked bowl guard and bowl lift
- Industry standard #12 attachment hub
- 120 Volt NEMA 5-15 P
- ETL listed
- Includes dough hook, beater & wire whip

One Year - Parts & Labor on entire unit. Valid in United States



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 7/17

Fax:(800).976.1299



Serv-Ware


Item# _____

Project: _____

Qty: _____

Mixers


PM10LA

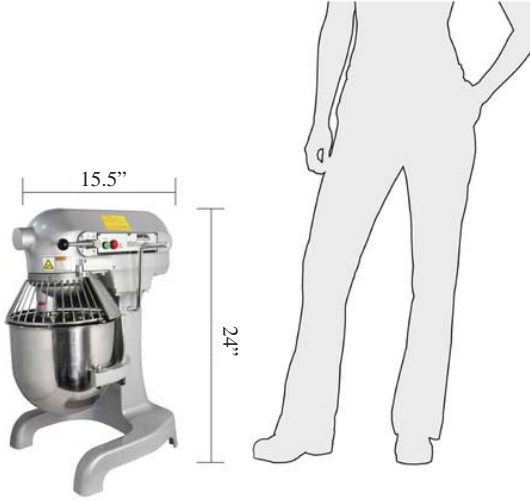

PM20-PTO



PM30-PTO

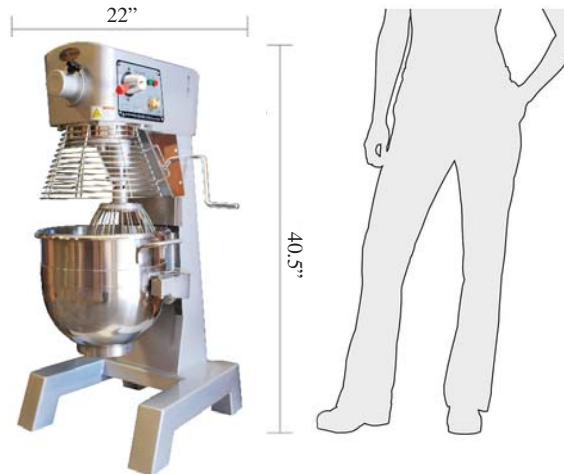

Serv-Ware

MODEL	POWER	1ST SPEED OF STIRRING SHAFT	2ND SPEED OF STIRRING SHAFT	3RD SPEED OF STIRRING SHAFT	OVERALL DIMENSIONS (W x D x H)	WEIGHT (Shipping)
PM10LA	.75 hp/120 volt/1 ph	108 RPM	195 RPM	355 RPM	20" X 19" X 28"	97 lbs.
PM20-PTO	1.475 hp/120 volt/1ph	108 RPM	195 RPM	355 RPM	25" X 23.50" X 35.50	238 lbs.
PM30-PTO	1.5 hp/120 volt/1 ph	91 RPM	166 RPM	282 RPM	28" X 26.50" X 50"	401 lbs.



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 7/17

Fax:(800).976.1299

