Item # Project: Qty:

Model No.

BB2-24-HC



BB2-24-HC

Features:

- CFC free refrigerant and foam
- Electronic thermostat and digital led temperature display for accurate control and easy reading
- · Self-closing door
- Magnetic gasket can be replaced without any tools
- Stainless steel top
- INTERIOR: Stainless Steel
- EXTERIOR: Black Painted Steel
- Unit ships with 3.5" low profile casters, not installed

10/15/2024

Warranty Info:

Three Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

Five Year

- Compressor, Part Only.





* See last two pages for more information on warranties and additional extended warranty coverages.



BB2-24-HC

Revised


Intertek


www.servware.com Phone:(800).768.5953 Fax:(800).976.1299


BB2-24-HC Backbar Bottle Cooler





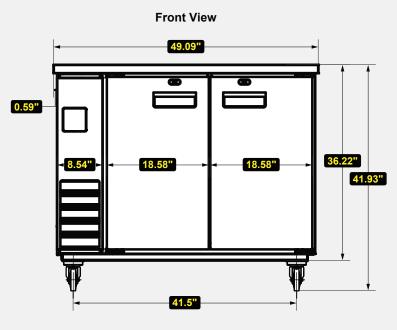







→ Technical Information:

MODEL#	DESCRIPTION	DIMENSIONS	WEIGHT/LBS.
		(W x D x H)	(Shipping)
BB2-24-HC	49 in. Unit	49.1" W x 24.4" D x 36.2" H	265 lbs.

CONSTRUCTION			
Exterior Material	Black Painted Steel		
Interior Material	Stainless Steel		
Insulation Material	CFC Free Foam		
Shelf Material	PVC Coated Wire		
Number of Shelves	1 per Door		

COOLING	*
Temperature Range	33°F – 41°F
Refrigerant+Charge oz.	R290 / 3.88 oz.
BTU/H	1155
Defrosting	Every 6 Hours
Horse Power	2/5
Storage Capacity	10 cu. ft.

Voltage 115 Amps 3.0 Hz 60 Phase 1

ADDITIONAL INFORMATION

Installation by certified commercial restaurant equipment installer recommended. Inspection before and after installation by licensed electrician for safe operation. Product designed for <u>interior</u> usage in a climate controlled location with adequate air circulation and not adjacent to a high temperature source.









